
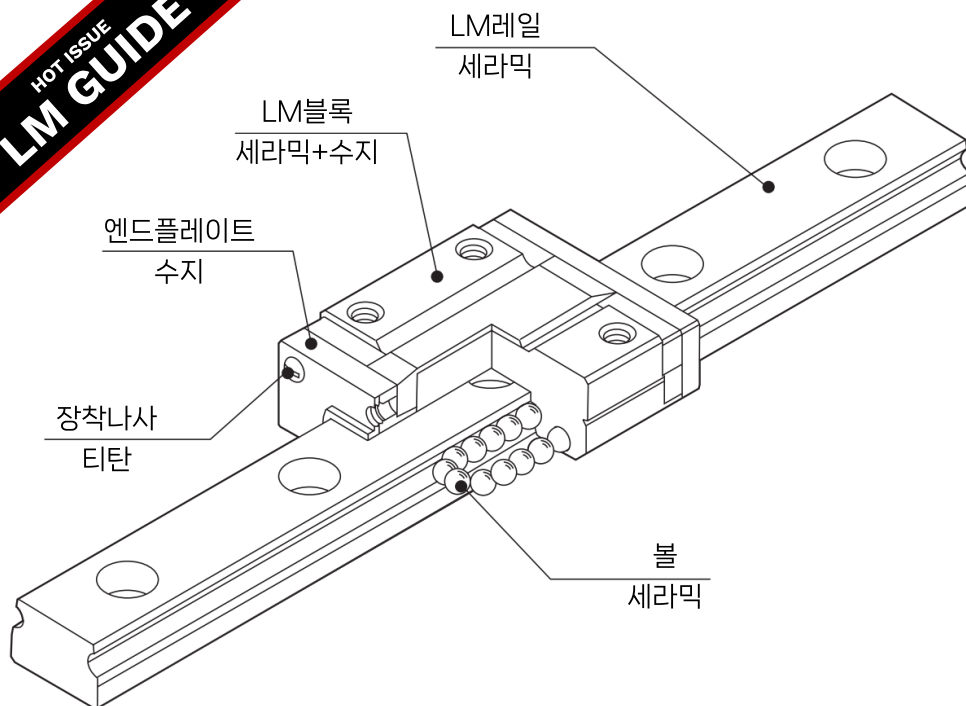


Ceramic LM Guide RSR-Z


HOT ISSUE
LM GUIDE

- ✓ 비자성
- ✓ 고내식
- ✓ 경량화 (금속의 1/2)
- ✓ 고강성



Ceramic LM Guide RSR-Z



RSR7 / RSR7W



RSR9 / RSR9W

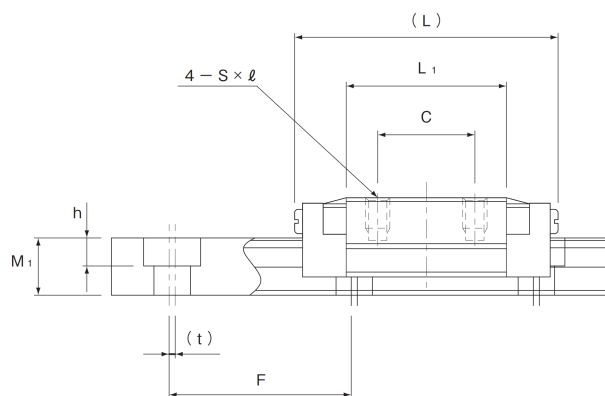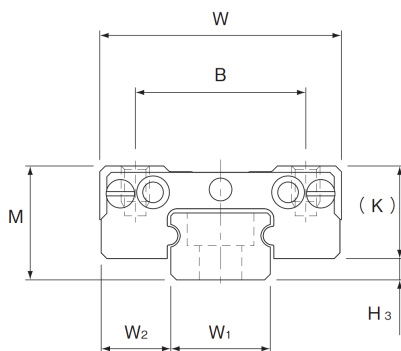

단위 : mm

형번	외형 치수			LM블록 치수					H3	LM레일 치수								
	M	W	L	B	C	S×l	L1	K		W1	W2	M1	F	d1	d2	(t)	h	길이max
RSR7	8	17	(21.6)	12	8	M2×2.5	13.2	6.5	1.5	7	5	4.7	15	2.5	φ4.7	(0.5)	2.3	130
RSR7W	9	25	(29.2)	19	10	M3×2.5	19.7	7	2	14	5.5	5.2	30	3.5	φ7	(1)	3.2	290
RSR9	10	20	(29.1)	15	10	M3×2.7	19.4	7.8	2.2	9	5.5	5.5	20	3.5	6	(1)	3.3	315
RSR9W	12	30	(37.6)	21	12	M3×2.8	27	9.1	2.9	18	6	7.5	30	3.5	6	(1)	4.5	320

※ () 값은 참고값임

※ 자세한 내용은 삼익THK로 문의하여 주십시오.

